

A4 316 Equivalent Corrosion Resistance

0-1km

S-BT-MR M8/7 SN 6

Hex nut with flange M8-A4

	SBT 4-A22 SF BT 18/22-A
	TS-BT 5.5-74 S
	SBT 4-A22 SFC 18/22-A
	S-DG BT M8/7 Short 6
	S-CC BT 6

Torque tool X-BT 1/4" 8 Nm / 5.9 ft.lb

S-NS 13C C 95/3 3/4"

1

2

3

4

5

SBT 4A-22 SFC 18/22-A

GEAR #1

6

1 2 **click!**

7

HILTI S-CC BT 6

8a

HILTI S-CC BT 6

8b

HILTI S-CC BT 6

8c

HILTI S-CC BT 6

S-DG BT M8/7 Short 6

9a

Max. ✓ Max. ✗

9b

Min. ✓ Min. ✗

10

11

1.6-7 mm (1/16 - 0.28")

$\varnothing \ge 13\text{ mm}$ (1/2")

12a



8 Nm / 5.9 ft.lb

12b

SBT 4A-22 SFC 18/22-A

12c

$T_{inst} \le 8\text{ Nm}$

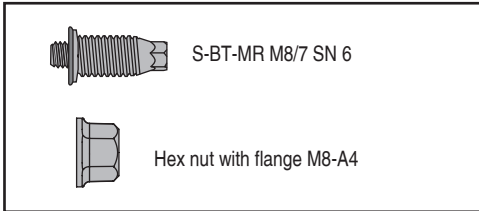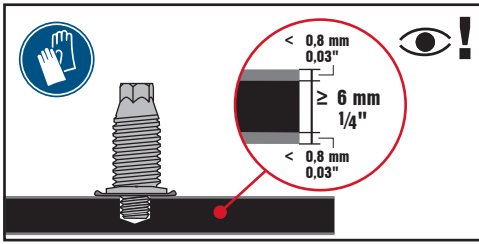

	SBT 4-A22
	TS-BT 5.5-74 S
	SBT 4-A22 SFC 18/22-A
	S-DG BT M8/7 Short 6
	S-CC BT 6

